

DS-7 Full Rise Dual Scissor Lift Features

- 7000 lbs. lift capacity
- Above-ground or In-ground installation
- Low 4 5/16 inch initial profile
- Full Rise to 72 13/16 inches
- Durable 4-cylinder design with anti-surge valves
- Infrared synchronization system
- Pneumatic safety locking system
- Drive-on ramps lock into position as platform extensions



Model: 6501V2

- 24v safe control system
- Height limit switch
- Lifting time: < 1 minute
- Powder coated finish
- Self lubricated bushing and bearing





Drive-on ramp and platform extension




Mechanical Safety Lock

Technical Specifications

- Lifting Capacity 7000 lbs.
- Max Lifting Height 72 13/16 inches
- Min Height 4 5/16 inch
- Lifting Time 50 sec - 60 sec
- Capacity of Motor 2.2kW
- Power supply 220v
- Air Supply 6-8 bar (87 - 116 psi)
- Platform width 25 9/16"
- Total unit weight 1,985 lbs.

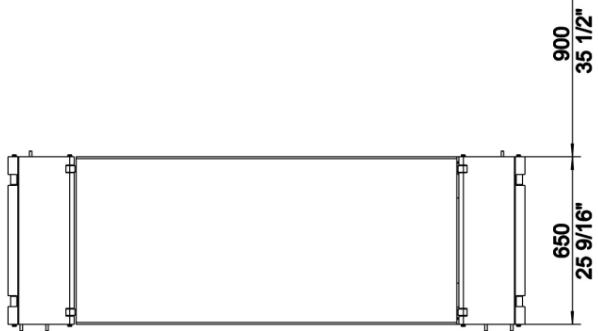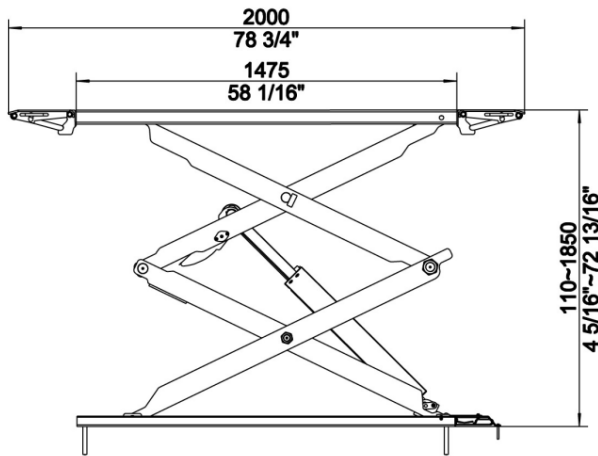

Model: 6501V2

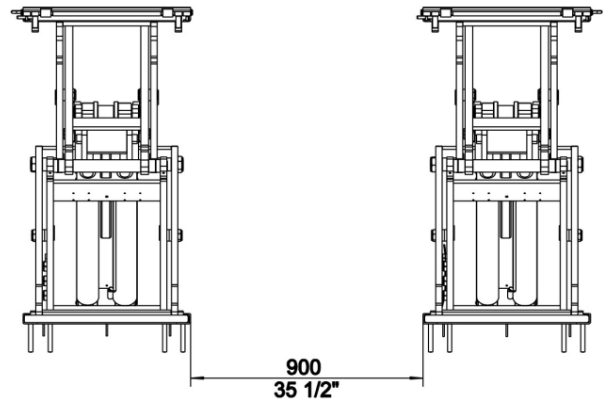

High Quality
Ball Valve

Height Limit
Switch

